


Installation Manual

IW25-5 IN Wall Dehumidifier Exterior Sleeve



Please Read and Save These Instructions

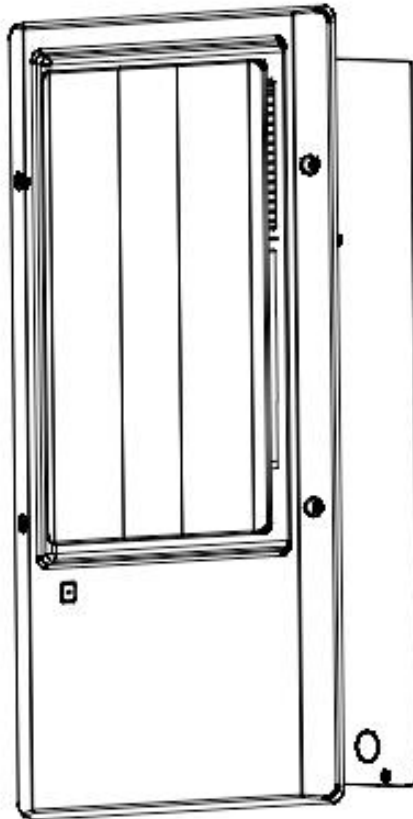

IW25-5 IN Wall Dehumidifier

Exterior Sleeve Installation

The IW25-5 In Wall Dehumidifier can be semi-recessed with an Exterior Sleeve for a clean bump out finish, where unit cannot be fully installed into a 90mm stud wall, ideal for retrofit applications.

The Exterior sleeve is not covered under the IW25-5 Dehumidifier Warranty and is **not compatible** with the IW25-5 ON Wall Dehumidifier.

Exterior Sleeve Dimensions:
445mm W x 775mm H x 56mm D



Exterior sleeve mounted against wall and firmly secured into a solid surface. (ie timber stud)



IW25-5 In Wall unit with mounting brackets attached to Exterior Sleeve



IW25-5 In Wall Dehumidifier installed with Exterior Sleeve and cover.

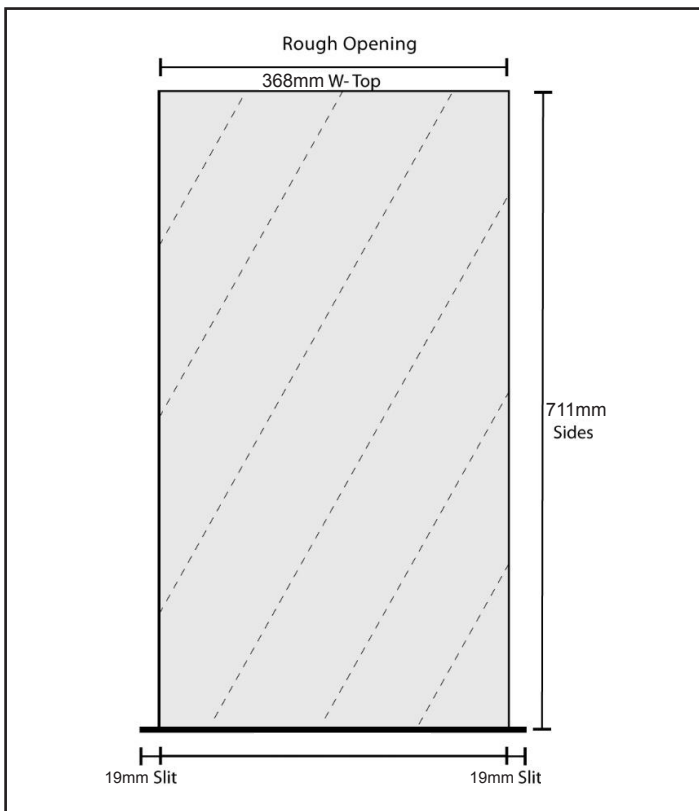


Figure 1

Installation

1. Follow steps 6-8 from the Installation and Operation Manual: IW25-5 Dehumidifier IN Wall (page 9).
2. Once step 8 is complete, there will be a cut out opening to partially recess the IW25-5 into cavity wall. Fit the exterior sleeve against the cut-out opening. Make sure the pop-out for drain/power are at the bottom of sleeve.(Figure 1)
3. Ensure the Exterior Sleeve is level and bottom of the IW25-5 will be supported. Attach Exterior Sleeve with 4 screws (not provided) directly through wall into studs.
4. Continue to Step 9 of the In Wall installation instructions.
5. In Step 11 of the In Wall installation instructions, use the four screws (included with the Exterior Sleeve) to attach the mounting tabs to the Exterior Sleeve.
6. Continue installation instructions in manual from step 12 to finish installation.